

TOSHIBA HERMETIC COMPRESSOR

SPECIFICATION

(Model) : **PA108M1C-4DZDE2** Issue NO. ) :



*This document will be effective with your authorized signature. Please return one (1) copy of this form, and keep the other two (2) copies for your records.*

## 1. 规格 SPECIFICATION

## 1-1、 压缩机要项 PRINCIPAL ITEMS OF COMPRESSOR


空调机的型式 AIR CONDITIONER TYPE	冷暖兼用型空调机 COOLING & HEATING
压缩机的型式 COMPRESSOR TYPE	全封闭型电动压缩机 HERMETIC MOTOR COMPRESSOR
压缩机方式 COMPRESSION TYPE	旋转式                  ROTARY
安全认证 Safety Approval	<b>TUV</b>
使用冷媒 REFRIGERANT	<b>R410A</b>
润滑油名·油量 OIL· OIL CHARGE	<b>ESTER OIL VG74 · 350</b> ml
涂装      PAINTING	黑色                  BLACK COLOR PAINT
总质量（含润滑油量） NET MASS（OIL INCLUDED）	<b>10.8</b> kg
排除容积 DISPLACEMENT	<b>10.8</b> cm <sup>3</sup> /rev
吸气管内径 SUCTION TUBE（I. D）	<b>9.8</b> mm
排气管内径 DISCHARGE TUBE（I. D）	<b>8.2</b> mm

## 1-2 电机 MOTOR

电机的型式· 起动方式 MOTOR TYPE· STARTING TYPE	单相诱导电机· 运转电容型 SINGLE PHASE INDUCTION MOTOR · PSC
极数 POLE	极 2 POLE
额定电压频率 RATED VOLTAGE· FREQUENCY	单相 <b>1φ-50Hz-220/240V</b>
额定回转数 RATED REVOLUTION	<b>48.1/48.5±1%</b> S-1
绝缘等级 INSULATION GRADE	类 E                          GRADE
绕组阻抗 WINDING RESISTANCE（20℃）	主绕组                  辅绕组 Main: <b>3.79±5%Ω</b> Aux.: <b>5.37±5%Ω</b>
起动电流 STARTING CURRENT	（at 1φ-50Hz-220/240V） <b>19.2+10%/—</b> A

## 1-3、电气部品规格. 配线接线图 ELECTRICAL COMPONENT &amp; WIRING DIAGRAM

品名 PARTS NAME	规格 SPECIFICATION
运转电容 RUNNING CAPACITOR	(用户自己准备 Out of Supply) 电容容量 Capacity : <b>25</b> $\mu$ F 耐压 Withstanding Voltage: <b><math>\geq 370</math></b> VAC
过载保护器 OVER LOAD PROTECTOR	外置 (EXTERNAL) <b>B160-135-241E</b>

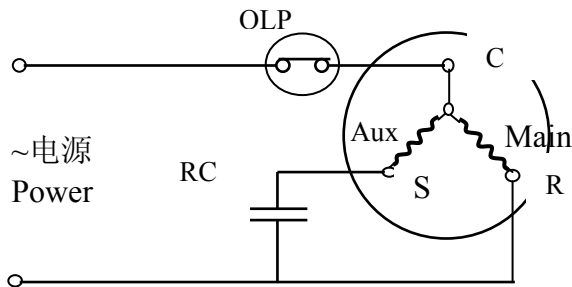

S: START (辅绕组 AUX WINDING)  
R: RUN (主绕组 MAIN WINDING)  
C: COMMON (共通)  
RC: 运转电容 RUNNING CAPACITOR

## 2. 压缩机及标准附属品一览 COMPRESSOR &amp; STANDARD ACCESSORY

品名 PARTS NAME	型号 TYPE (MODEL)	个数 PIECES	图纸代号 DRAWING CODE	备注 Note
压缩机外形图 DRAW EXTER	PA108M1C-4DZDE2	1	<b>1K51880510</b>	.....
橡胶垫 RUBBER CUSHION	底脚用 FOR BASE OF-TYPE	3	<b>1K14910111</b>	.....
端子罩 TERMINAL COVER	外保护器定速机共用 FOR FIXED-FREQUENCY MODELS	1	<b>1K14722610</b>	.....
端子衬垫 TERMINAL PACKING	外保护器定速机专用 FOR External OLP FIXED-FREQUENCY MODELS	1	<b>1K14720913</b>	.....
螺母衬垫 NUT PACKING		1	<b>1K14721010</b>	.....
端子螺母 TERMINAL NUT		1	<b>1K14300711</b>	.....
过载保护器弹簧 OVEEBAD PROTECTOR SPRING	外保护器定速机专用 FOR External OLP FIXED FREQUENCY MODEL	1	<b>1K14460410</b>	.....
过载保护器 OVERLOAD PROTECTOR	B160-135-241E	1	<b>1K14920210</b>	.....
接地螺钉 EARTHING HEX BOLT	* 铜质镀镍螺钉 NI-PLATED COPPER BOLT	1	<b>1K14300210</b>	.....
接地螺钉垫片 WASHER FOR EARTHING BOLT	* 铜质镀镍垫片 NI-PLATED COPPER WASHER	1	<b>1K14300310</b>	.....

请用东芝指定之压缩机零部件和附属品。 USE COMPRESSOR PARTS AND ACCESSORIES SPECIFIED BY TOSHIBA

**\*！ 请注意 ! Attention:**

如使用压缩机底脚上的接地孔，务必将原压缩机上的防锈保护钢质螺钉与垫片卸下废弃，换上附件中的铜质螺钉与垫片或相当品。

If the Earthing Hole on the Base of Compressor will have been connected with Earthing Wire, Please Remove and throw away the Antirust Steel Bolt and Washer which has been installed on Compressor, and Use the Copper Bolt and Washer listed above or Equivalent.

## 3. 运转标准 STANDARD OF PERFORMANCE

## 3-1、性能 RATED PERFORMANCE

			(参考) GB 条件时 AT GB STANDARD
冷冻能力/CAPACITY	W	☆	2570/2570 ± 5%
输入功率/MOTOR INPUT	W	☆	860/905 ± 5%
电流/CURRENT	A	☆	4.00/4.00 ± 5%
COP	W/W %	☆	298/283 ± 5%
噪音/NOISE (Sound Power Level)	dB (A)	★	66 以下 MAX
振动 VIBRATION (法线方向振动实效值)	m/s <sup>2</sup>	★	2.8 以下 MAX

## ☆测定条件 RATING CONDITIONS

- 额定电压 RATED VOLTAGE :1φ-50Hz-220/240V
- 冷凝温度 COND. TEMP. :54.4℃
- 蒸发温度 EVAP. TEMP :7.2℃
- 吸气温度 RETURN GAS TEMP :35℃
- 过冷却液温 LIQUID TEMP. :46.1℃
- 环境温度 AMBIENT TEMP. :35℃
- 强制空冷 FORCED AIR

※根据东芝量热标准

ACCORDING TO TOSHIBA'S CALORIEMETER STANDARD

## ★测定条件 RATING CONDITIONS

- 额定电压 RATED VOLTAGE :1φ-50Hz-220/240V
- 冷凝温度 COND. TEMP. :54.4℃
- 蒸发温度 EVAP. TEMP :7.2℃
- 吸气温度 RETURN GAS TEMP :18℃
- 排气温度 DISCHARGE TUBE TEMP. :80.0℃
- 环境温度 AMBIENT TEMP. :20.0℃

※排气温度由冷媒回液量控制

DISCHARGE TUBE TEMP IS CONTROLLED BY FLOOD BACK AMOUNT OF REFRIGERANT

运转停止电压 B.D.V	V	198 以下 MAX	Pd/Ps=4.15/1.15 MPa
起动电压 STARTING VOLTAGE	V	187 以下 MAX	Pd=Ps=1.57 ± 0.1 MPa Pd-Ps ≤ 0.05 MPa

## 3-2、一般特性 CHARACTERISTICS

气密试验压力 (AP) LEAK TIGHT PRESSURE	高压侧 HIGHER PRESSURE SIDE	4.3 MPa
	低压侧 LOWER PRESSURE SIDE	2.1 MPa
耐压试验压力 (TP) HYDROSTATIC STRENGTH PREESSURE	高压侧 HIGHER PRESSURE SIDE	6.3 MPa
	低压侧 LOWER PRESSURE SIDE	3.2 MPa

绝缘阻抗 (封入氮气时) INSULATION RESISTANCE (FILLED WITH NITROGEN GAS)	20 MΩ	以上 MIN
绝缘耐压 WITHSTAND VOLTAGE	AC1500V-1min	
残余水分量 RESIDUAL MOISTURE	• 含尘量 RESIDUAL IMPURITIES	160mg 以下 • 45mg 以下 MAX • MAX
接地阻抗 EARTHING RESISTANCE	0.1 Ω	以下 MAX

## 4、使用条件范围 OPERATING CONDITIONS

项目 ITEMS	负荷 LOAD	标 准 STANDARD		最 高 MAX.	
排气压力 DISCHARGE PRESSURE	MPa(G)	3.28	以下 MAX	4.15	以下 MAX
吸气压力 SUCTION PRESSURE	MPa(G)	0.89		1.15	以下 MAX
压缩比 COMPRESSION RATIO		8	以下 MAX	8	以下 MAX
绕组温度 MOTOR COIL TEMP.	℃	100	以下 MAX	125	以下 MAX
排气管温度 DISCHARGE TUBE TEMP.	℃	100	以下 MAX	115	以下 MAX

## ※ 空调系统设计制造注意事项 SYSTEM DESIGN AND PROCESS LIMITATIONS

许容冷媒封入量 LIMIT OF REFRIGERANT AMOUNT	kg	0.85 kg	以下 MAX
连续液返回量 CONTINUOUS FLOOD BACK		连续液在储液罐前的返回量不超过总冷媒循环量的 10% CONTINUOUS FLUID BACK BEFORE THE ACCUMULATOR NOT BE MORE THAN 10% OF TOTAL CIRCULATION QUANTITY OF REFRIGERANT.	
异常音、异常电流 ABNORMAL NOISE & CURRENT		起动时和冷冻循环切换时没有异常音及异常电流发生 KNOCKING NOISE OR OVERCURRENT SHOULD NOT OCCUR AT START-UP OR REVERSING CYCLE.	
温差ΔT: TEMP.DIFFERENT℃ (ΔT=壳底部温度-冷凝温度) (ΔT=CASE BOTTOM TEMP -CONDENSING TEMP)		连续运转时(包含除霜、除湿)温差在 5℃以上。控制运转时在 0℃以上。 5 OR MORE: CONTINUOUS OPERATION 5 OR MORE: DEFROSTING OPERATION 5 OR MORE: DRY OPERATION 0 OR MORE: CONTROLLED INTERMITTENT OPERATION	
断续运转间隔、次数 INTERMITTENT OPERATION TIMES		每一循环 5 分钟以上 (ON2 分钟以上、OFF2 分钟以上)。20 万次冷冻循环以下。 200000 CYCLES OR LESS, 5 MINUTES OR MORE (ON: 2MINUTES OR MORE, OFF: 2MINUTES MORE)	
运转电压波动允许范围 SUPPLY VOLTAGE RANGE		220V-10%~240V+10%(198~264V)以内 THE SUPPLY VOLTAGE SHOULD BE 220V-10%~240V+10%(198~264V)	

运转频率允许范围 POWER FREQUENCY	额定频率的±2%以内 THE POWER FREQUENCY SHOULD BE THE RATED VALUE ±2%
起动时的压力差 PRESSURE DIFFERENCE AT START-UP	起动时高压侧和低压侧压力平衡 THE PRESSURE SHOULD BE BALANCED THE HIGH-PRESSURE AND LOW-PRESSURE SIDES AT START-UP
许容运转倾斜度 TILT IN OPERATION	压缩机在倾斜角 5°以内可以正常运转 COMPRESSOR SHOULD BE RUN AT A GRADIENT OF UP TO 5°

许容油面高度 LUBRICATION OIL LEVEL	压缩机润滑油面高度标准如下图，但是见到润滑油起泡时，起泡部份不计入在内。 THE LUBRICATION OIL LEVEL IN A COMPRESSOR SHOULD BE AS LISTED BELOW IF THE LUBRICATION OIL IS FOAMING FOAM SHOULD BE EXCLUDED FROM THE OIL LEVEL	
	运转条件 OPERATING CONDITION	润滑油面 OIL LEVEL
	连续运转时 IN CONTINUOUS OPERATION	B水平线以上 B LEVEL OR HIGHER
起动时 WHEN STARTING	动转起动时 CONTROLLED START	B水平线以上 B LEVEL OR HIGHER
	冷媒沉积时起动 AFTER SOAKING	B水平线以上。起动3分钟之后油面在A水平线以上。 B LEVEL OR HIGHER, A LEVEL OR HIGHER WITHIN 3MINUTES AFTER START-UP
除霜时 IN DEF-ROSTING	热气除霜 DEFROSTING-HOT GAS	B水平线以上 B LEVEL OR HIGHER
	逆向除霜 REVERSE CYCLE	B水平线以上 B LEVEL OR HIGHER
许容配管应力 TUBE STRES	压缩机配管不要产生共振。对于配管施加之应力请控制在下表允许应力值之内，配管设计时考虑防止应力折损。 TUBE TO BE CONNECTED WITH A COMPRESSOR SHOULD BE FREE OF RESONANCE. THE TUBE STRESS SHOULD NOT EXCEED THE VALUES LISTED BELOW TUBE SHOULD NOT BREAK DURING OPERATION, AT START-UP, AND AT STOP	

振动模式 VIBRATION MODE	许容应力值（半振幅） ALLOWABLE TUBING STRESS (HALF AMPLITUDE)	
运转时 OPERATING	20N/mm <sup>2</sup>	以下 OR LESS
起动时、停止时 START-UP STOP	30N/mm <sup>2</sup>	以下 OR LESS
运输时、装卸时 IN TRANSIT	30N/mm <sup>2</sup>	以下 OR LESS

压缩机禁止横放、倒置 DO NOT PUT A COMPRESSOR ON ITS SIDE OR TURN OVER.

压缩机承受的冲击负荷在 590m/s<sup>2</sup>以下，此外，压缩机的附属品应免受冲击。（如端子盖等）  
AN IMPACT TO COMPRESSOR SHOULD BE LIMITED TO 590m/s<sup>2</sup> OR LESS ,NOT GIVE A SHOCK TO ACCESSORIES.

密封橡胶垫拔除后，请防止潮湿空气进入压缩机内部，请不要长时间放置。  
DO NOT LEAVE THE PLUGS OF THE COMPRESSOR IN THE ATMOSPHERE FOR MANY HOURS AFTER OPEN FOR PREVENTING WATER FROM GETTING INSIDE.

空气运转时油质会加速劣化，绝对禁止。  
AVOID OPERATION WITH AIR FOR PREVENTING THE LUBRICATION OIL'S DETERIORATION FROM ACCELERATING.

封入冷媒时请从冷凝器出口封入。  
REFRIGERANT MUST ALWAYS BE FILLED FROM THE HIGHER SIDE OF THE REFRIGERATION CYCLE

绝对禁止压缩机逆向运转，逆运转过的压缩机不能再使用。  
DO NOT REVERS COMPRESSOR OPERATION. DO NOT REUSE THE COMPRESSOR THAT ROTATED IN REVERS.

压缩机请不要放置在露天，请在-10~+65℃室内保管。  
DO NOT ALLOW COMPRESSOR TO BE WEATHERED; STORE COMPRESSORS INDOOR AT -10~+65℃

连接压缩机引出线的长度要充分考虑压缩机振动，应留有余量。  
LEAD WIRE CONNECTED TO A COMPRESSOR SHOULD HAVE A SUFFICIENT ALLOWANCE AGAINST VIBRATIONS OF A COMPRESSOR.

压缩机壳体表面温度可能会达 150℃高温，不容许配线或类似物接触压缩机表面。  
SINCE THE COMPRESSOR TEMPERTURE MAY RISE AS HIGH AS 150℃, DO NOT ALLOW ELECTRIC CABLES OR THE LIKE TO DIRECTLY TOUCH COMPRESSORS.

压缩机的终端盖内禁止水滴，灰尘进入，必须做适当的防湿、防尘处理。  
TAKE PRORER MOISTURE-PROOF OR DUST-PROOF MEASURES FOR THE COMPRESSOR TERMINAL BOX IF WATER DROPLETS, DUST, OR THE LIKE MAY OTHERWISE ENTER.

请注意压缩机外壳应避免与吸湿性的材料接触，以防止腐蚀。另外，不要暴露在腐蚀气体或有机物之中。  
TURN ATTENTION TO GATHERING RUST ON IT'S SHELL WHEN ALLOWED COMPRESSOR TO COME IN TOUCH WITH HYGROSCOPIC MATERIALS. NOT BE EXPOSED TO CORROSIVE GASES OR ORGANIC SUBSTANCES.

使用在分体机的场合，最长配管不超过 15m，配管的高低落差最大 5m。除本规定情况外，有关使用条件范围也应满足。  
FOR SPLIT TYPE AIR-CONDITIONERS, THE MAXIMUM PIPING LENGTH SHOULD BE 15m,

<p>AN ELEVATION DIFFERENCE SHOULD BE WITHIN 5m, ALSO THE REQUIREMENTS HEREIN SHOULD BE MET.</p>
<p>许容冷媒量超出使用状况，须另行协商决定压缩机规格（储液器容量、油量等）以及空调系统的规格（储液器、曲轴箱加热器、油分离器、控制装置等）。</p> <p>IF GAS CHARGE AMOUNT OF REFRIGERANT SPECIFIED IS EXCEEDED, BOTH PARTIES SHOULD DISCUSS THE MATTER TO DETERMINE COMPRESSOR SPECIFICATION (ACCUMULATOR VOLUME, LUBRICATING OIL AMOUNT) AND SYSTEM SPECIFICATIONS (CRANK CASE HEATER, OIL SEPERATOR, ADDITONAL ACCUMULATOR, ETC.).</p>
<p>没得到 TOSHIBA 的授权请不要随意更改压缩机规格。R410A 之外的冷媒禁止使用，否则有发生爆炸的可能。（特别是绝对禁止空气压缩）</p> <p>DO NOT MODIFY A COMPRESSOR WITHOUT TOSHIBA'S AUTHORIZATION. DO NOT FILL THE REFRIGERATION CYCLES WITH GAS EXCEPT R410A, AS A COMPRESSOR MAY GO-UP IN A BLAST. (ESPECIALY COMPRESSING AIR IS NOT PERMITTED)</p>
<p>不准手拎排气管进行搬运、装卸。</p> <p>DO NOT PROVIDE ANY FORCE ON DISCHARGE TUBE WHEN COMPRESSOR IS MOVED AND TRANSFERRED</p>
<p>请不要裸手触摸运行中或刚停机正处于高温的压缩机，当心烫伤。</p> <p>DO NOT TOUCH THE COMPRESSOR WITH BARE HANDS DURING OPERATION OR IMMEDIATELY AFTER STOPPAGE. THE COMPRESSOR IS AT A HIGH TEMPERATURE. THERE IS THE DANGER OF BURNS.</p>
<p>维修保养设备时必须配戴防护眼镜。由于焊枪温度过高，拆卸配管时，当心会有冷媒、油的溅出而导致烫伤或进入眼中。</p> <p>WEAR SAFETY GOGGLES WHEN SERVICING THE UNIT. WHEN REMOVING THE TUBES BY HEATING IT WITH A BURNER, THERE IS THE DANGER OF BURNS OR EYE INJURY IF THE REFRIGERANT AND/OR OIL REMAINING IN THE TUBES IS EMITTED.</p>

## 5、 其它 THE OTHERS

### 5-1、 充填N<sub>2</sub>气体 SEALING WITH NITROGEN GAS.

旋转式压缩机为防止生锈，填充有氮气。橡胶栓塞拔下时确认氮气吐气声。

THE ROTARY COMPRESSOR ARE SEALED WITH NITROGEN GAS FOR RUST PREVENTION WHEN REMOVING THE RUBBER CAP, IT SHALL BE MADE SURE AUDIBLY THAT THE NITROGEN GAS REMAINS.

### 5-2、 包装 CONTAINER

压缩机包装式样依据本公司之标准。

A STANDARD CONTAINER SPECIFIED IN TOSHIBA IS USED.

### 5-3、 规格书有效期限


本规格书经贵公司承认之日后即生效。如更改须再发行承认生效，以前之规格书便自动失效。

THIS DOCUMENT WILL EFFECTIVE AFTER TOSHIBA'S RECEIPT WITH YOUR AUTHORIZED SIGNATURE WHEN DESIGN MODIFICATION IS APPROVED BY THE CUSTOMER , THE CURRENT DOCUMENT IS UNAVAILABLE.




**R410A冷媒压缩机使用压力条件范围**  
**OPERATING CONDITIONS OF R410A REFRIGERANT COMPRESSOR**

单位:MPa(表压)  
 UNIT:MPa(G)


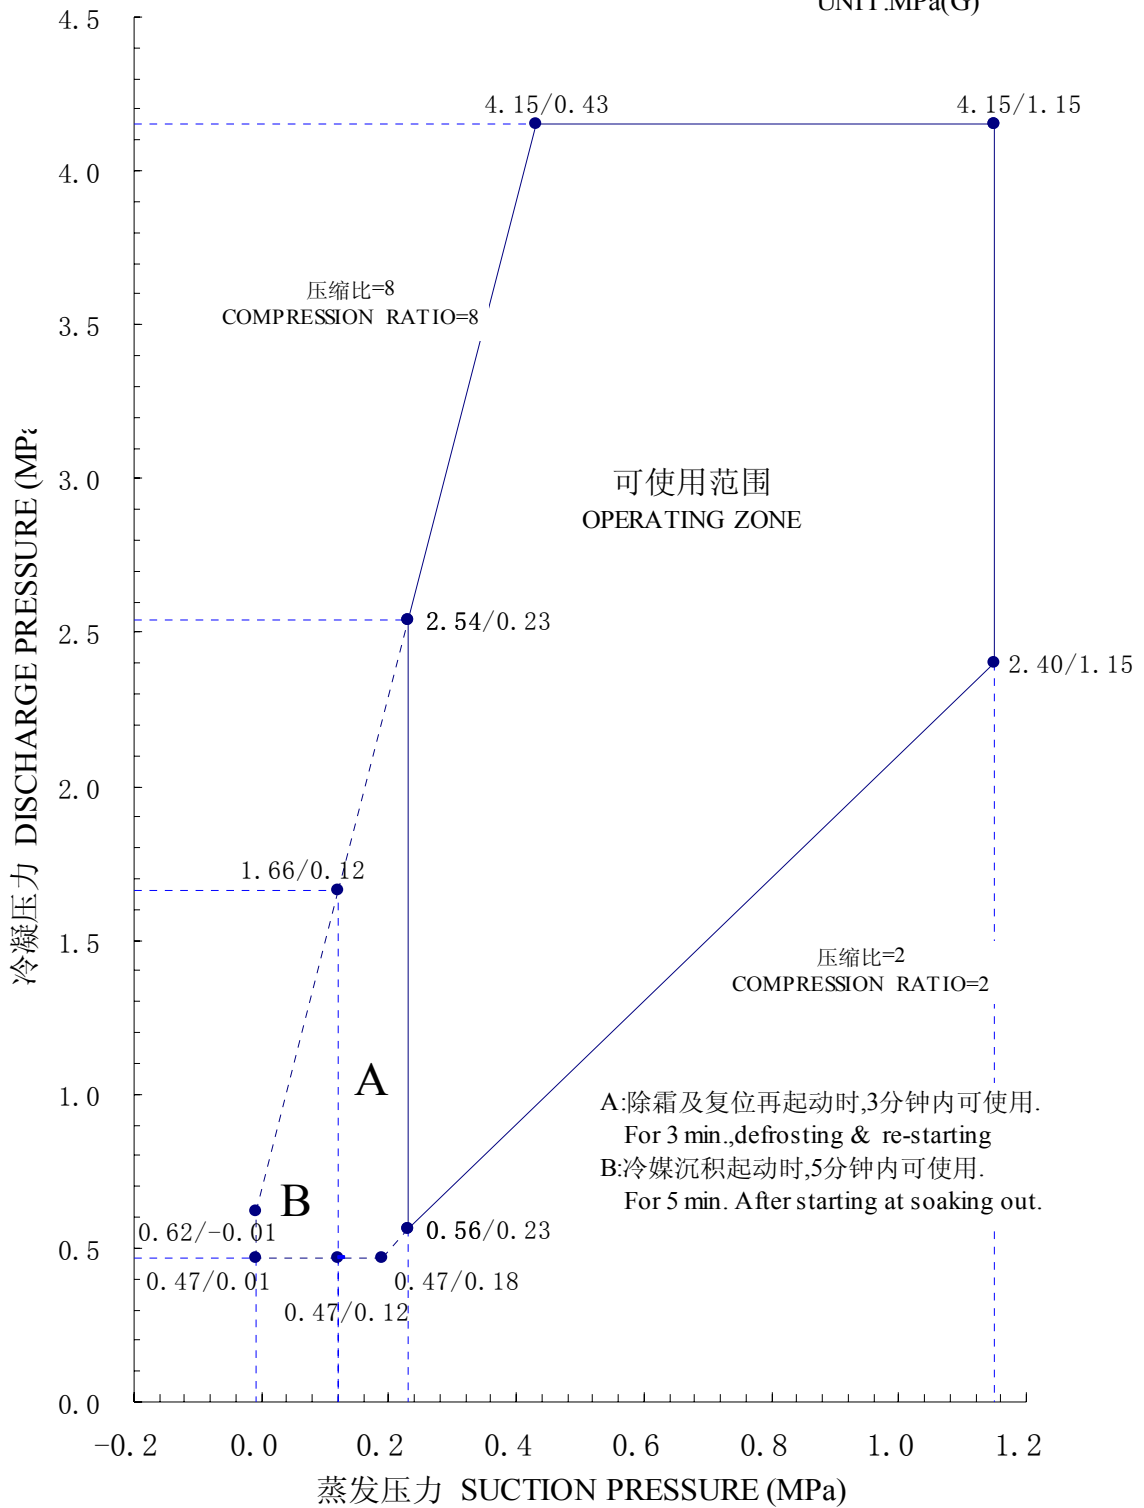


# ELE COMPONENTS

Drawing No. 1K14722017

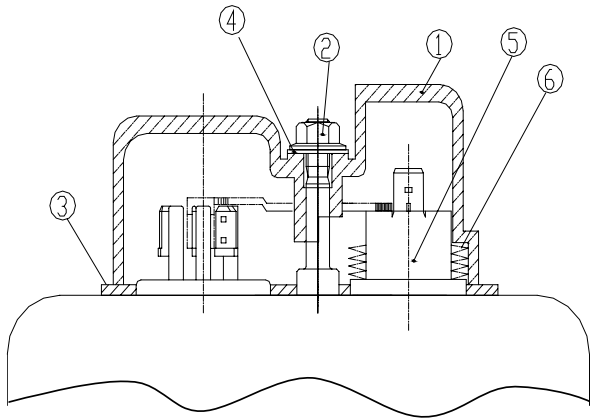

⑥	OL SPRING	1K14460410
⑤	OVERLOAD PROTECTOR	1K14920*Gr
④	NUT PACKING	1K14721010
③	TERMINAL PACKING	1K14720913
②	TERMINAL NUT	1K14300711
①	TERMINAL COVER	1K14722610
PART NO	TITLE	DRAWN NO

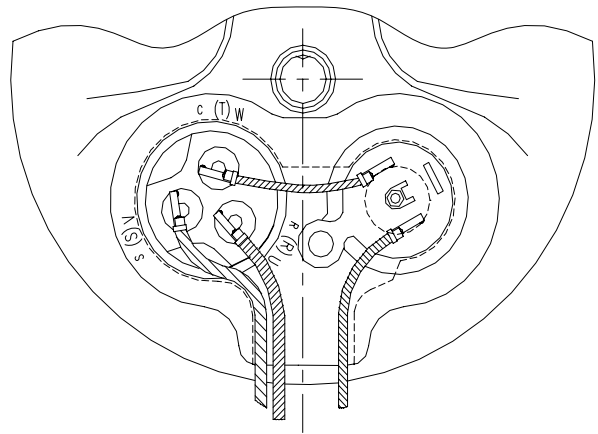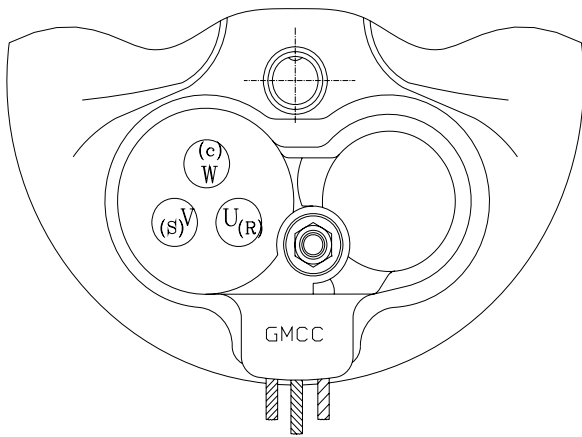



## NOTES

Tightening torque of terminal nut:  $1.2 \pm 0.2 \text{ Nm}$



广东美芝制冷设备有限公司  
GUANGDONG MEIZHI COMPRESSOR LTD

# TERMINAL COVER

Drawing No. 1K14722610

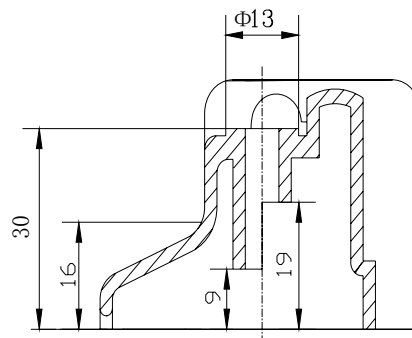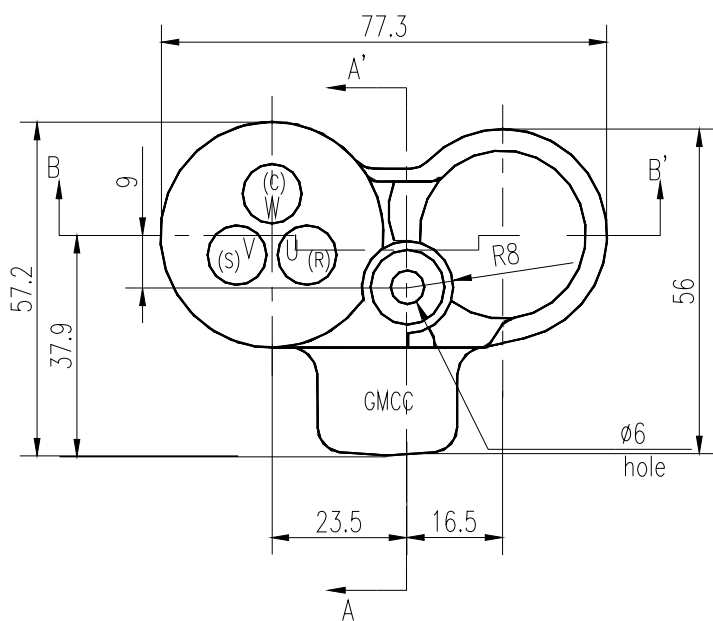

Section A-A'

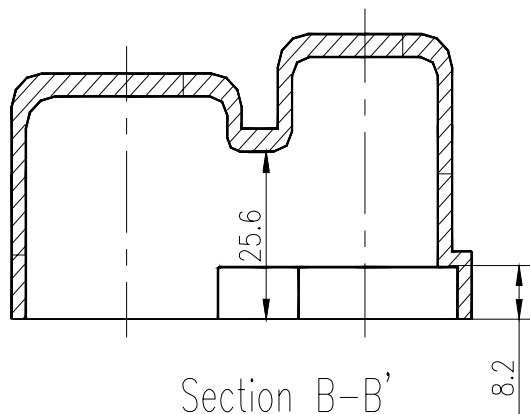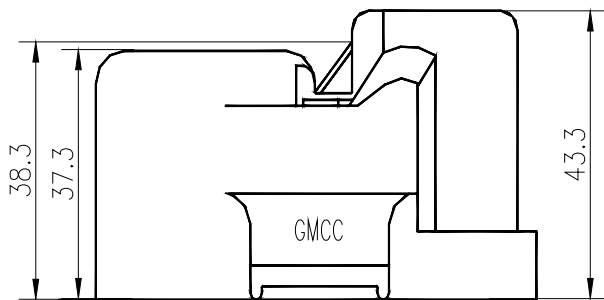

Section B-B'


NOTES

MATERIAL:POLYBUTYLENE TEREPHTHALATE

COLOR :BLACK

广东美芝制冷设备有限公司  
GUANGDONG MEIZHI COMPRESSOR LTD



## External Overload Protector 外置保护器 1K14920\*Gr

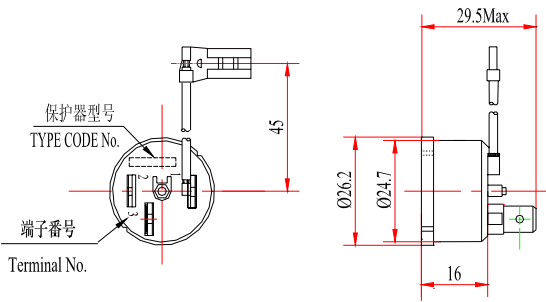


制造厂：佛山通宝股份有限公司  
 Manufacturer: Foshan TongBao Co., Limited  
 型号Model: B × × × - × × × - × × × ×

制造厂：苏州江南航天机电工业公司  
 Manufacturer: Suzhou JiangNan Co., Limited  
 型号Model: B F × × × - × ×

☆注：根据型号不同，端子插片位置可在2或3处。  
 ☆Note: Terminal may be at the position of "2" or "3" because of different Model.

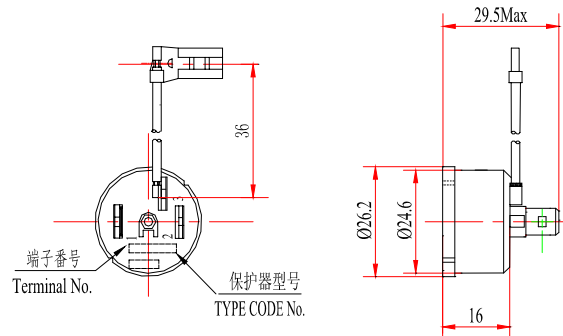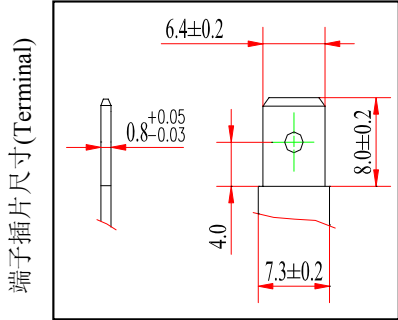

制造厂：德州仪器（中国）有限公司  
 Manufacturer: Texas Instrument (China) Co., Limited  
 型号Model: MRA × × × × - 9087

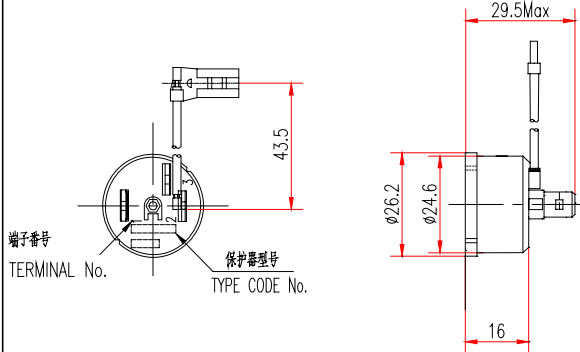

制造厂：德州仪器（中国）有限公司  
 Manufacturer: Texas Instrument (China) Co., Limited  
 型号Model: MRA × × × × - 9084


注意:具体选用保护器型号(图号)见规格书第2项“压缩机及标准附属品一览”表Notes:Please Selected the OLP Model(Drawing NO)indicated at the Table"COMPRESSOR & STANDARD ACCESSORY" in Article 2 of this specificatin Sheet.

1K14920	610	BF785-MH	135±5	69±11	
	180	B190-135-141E	135±5	69±11	
	170	B265-135-141E	135±5	69±11	
	160	B480-135-141E	135±5	69±11	
	150	B440-135-141E	135±5	69±11	
	140	B350-135-141E	135±5	69±11	
	130	B300-130-141E	130±5	69±11	
	120	B185-135-141C	135±5	69±11	
	110	B160-135-141E	135±5	69±11	
	270	B140-135-241E	135±5	69±11	
	260	B190-135-241E	135±5	69±11	
	250	B150-135A-241E	135±5	69±11	
	240	B150-135-241E	135±5	69±11	
	230	B190-130-241E	130±5	69±11	
	220	B135-135-241E	135±5	69±11	
	210	B160-135-241E	135±5	69±11	
	720	MRA99948-9084	135±5	69±11	
	710	MRA99947-9087	135±5	69±11	
	050	MRA99950-9087	135±5	69±11	
	040	MRA99949-9087	135±5	69±11	
	032	MRA13430-9087	135±5	69±11	
	022	MRA13408-9087	135±5	69±11	
	012	MRA13407-9087	135±5	69±11	
	图号 Drawing No.	型号 Model	动作温度 Trip Temp.(°C)	复位温度 Reset Temp.(°C)	备注 Remarks

广东美芝制冷设备有限公司  
 Guangdong Meizhi Compressor Limited

# OL SPRING

Drawing No. 1K14460410

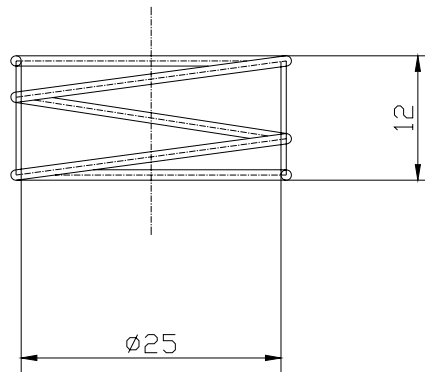

① Wire diameter	$\phi 1.2$
② Total number of winding	2.88T
③ Inner diameter	$\phi 25$
④ Effective winding number	0.88T
⑤ Winding direction	right
⑥ Spring specification	Load in used length 6mm: $4.5 \pm 1N$


## NOTES

MATERIAL:SUS304

广东美芝制冷设备有限公司  
GUANGDONG MEIZHI COMPRESSOR LTD

# TERMINAL PACKING

Drawing No. 1K14720913

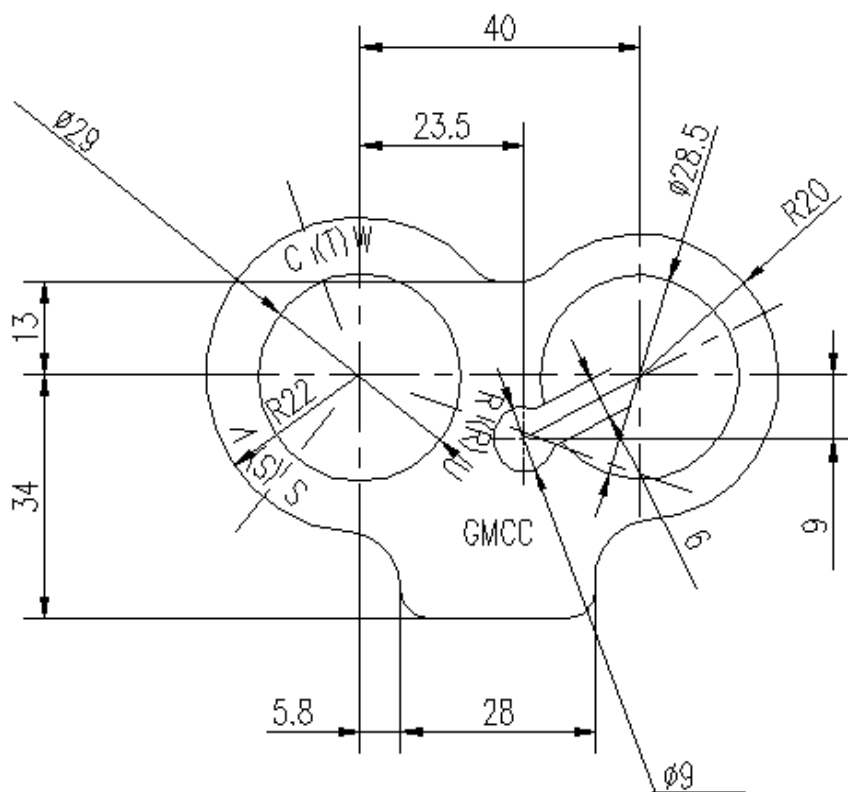

## NOTES

MATERIAL:SI

THICKNESS: 1mm


COLOR:BLACK

广东美芝制冷设备有限公司  
GUANGDONG MEIZHI COMPRESSOR LTD

# NUT    PACKING

Drawing    No. 1K14721010

**THICKNESS : 1mm**

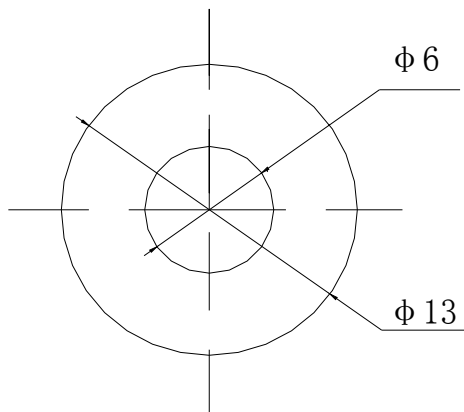


NOTES  
MATERIAL:SI  
COLOR:BLACK

广东美芝制冷设备有限公司  
GUANGDONG MEIZHI COMPRESSOR LTD

# TERMINAL NUT

Drawing No. 1K14300711

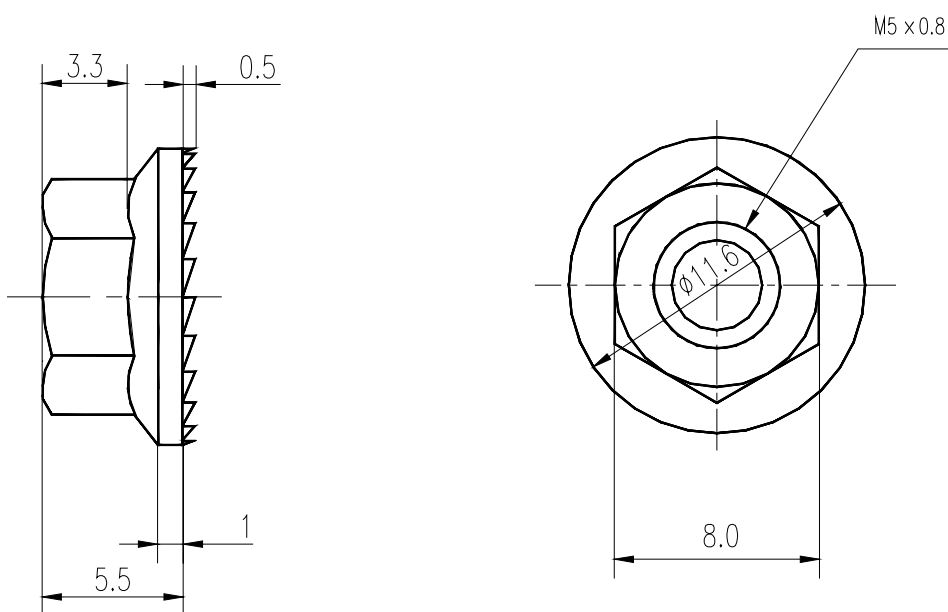

NOTES

MATERIAL:SWCH10


TREATMENT: WITHOUT HEXAVALENT CHROMIUM COMPOUNDS

广东美芝制冷设备有限公司  
GUANGDONG MEIZHI COMPRESSOR LTD



# RUBBER CUSHION


Drawing No. 1K14910111

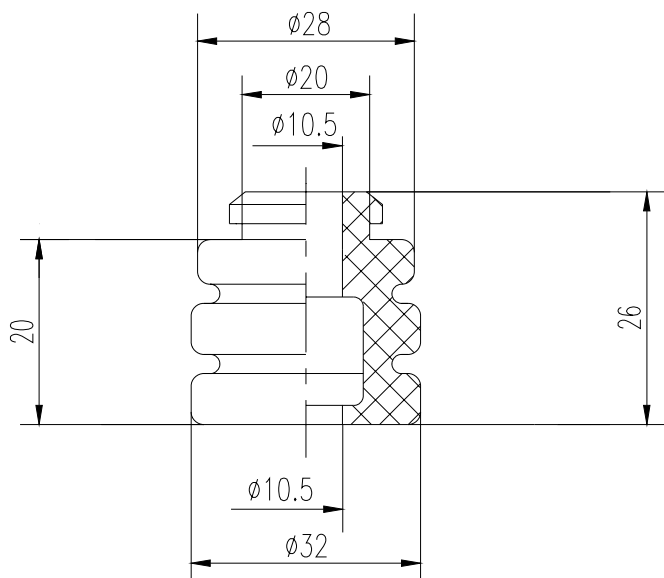

## NOTES

MATERIAL : EPDM


HARDNESS : HS=38

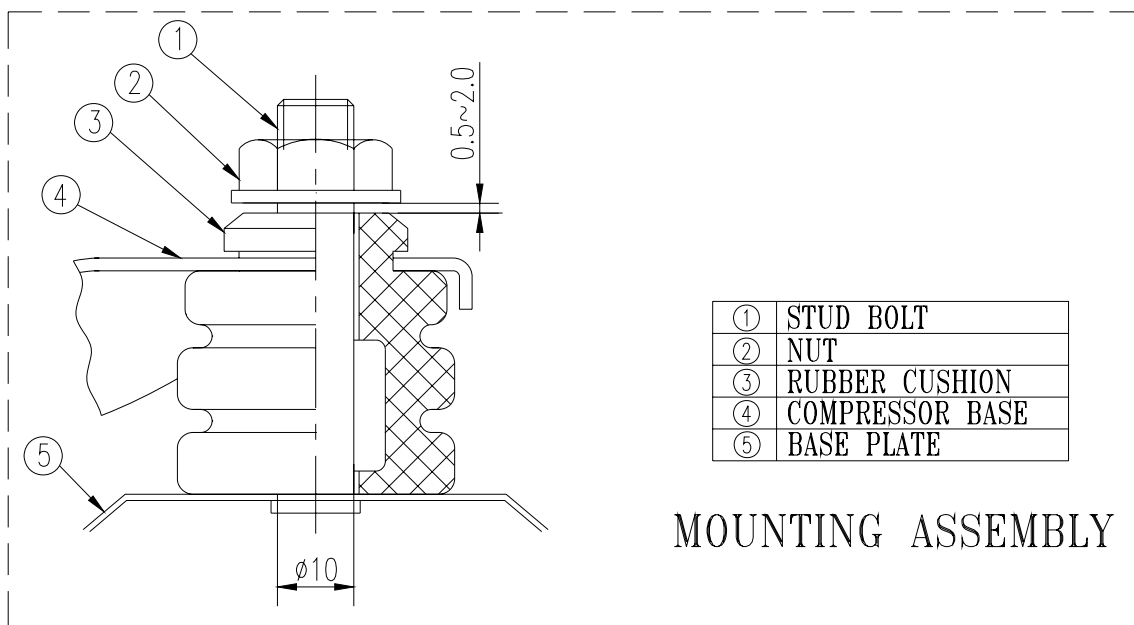

## MOUNTING ASSEMBLY

# EARTHING HEX BOLT

Drawing No.1K14300210

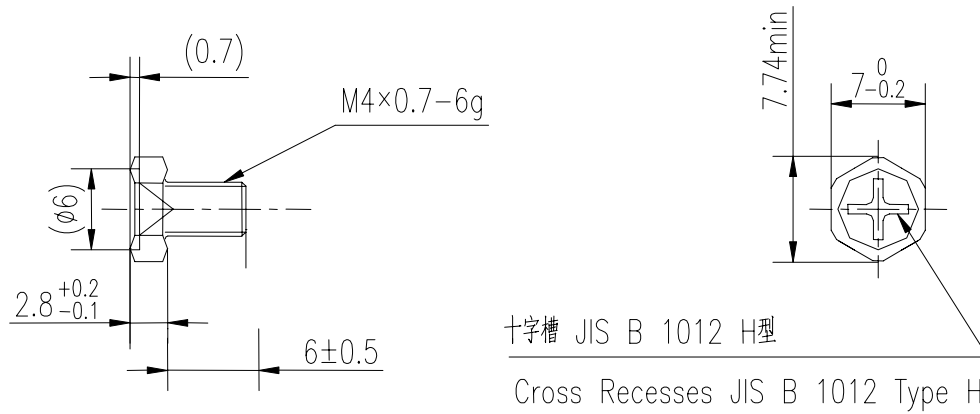

## NOTES


MATERIAL:C2700W-1/4H

TREATMENT:ELECTROPLATED COATINGS OF NICKEL(Ep-Cu/Ni 3 b)

广东美芝制冷设备有限公司  
GUANGDONG MEIZHI COMPRESSOR LTD

# WASHER FOR EARTHING BOLT

Drawing No.1K14300310

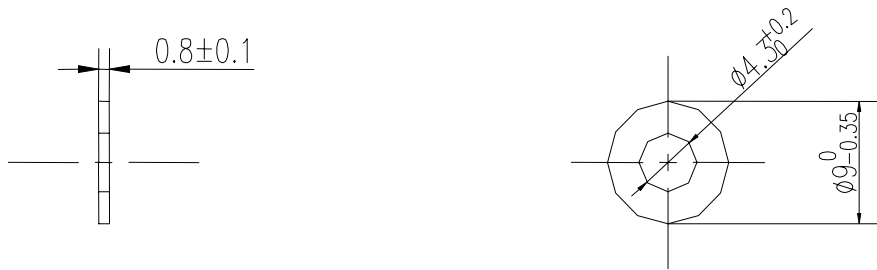

NOTES




MATERIAL:C2700W1/4H

TREATMENT:ELECTROPLATED COATINGS OF NICKEL(EpCu/Ni 3 b)

广东美芝制冷设备有限公司  
GUANGDONG MEIZHI COMPRESSOR LTD

TOSHIBA

1K518805Gr  
DRAWING NO.

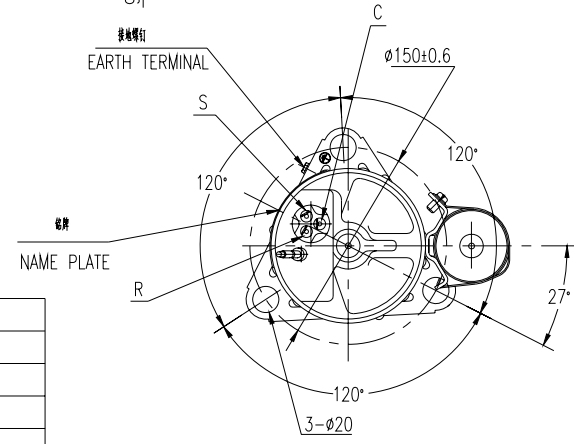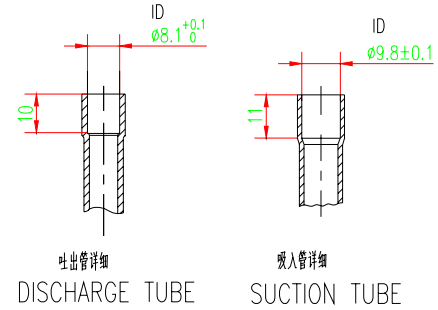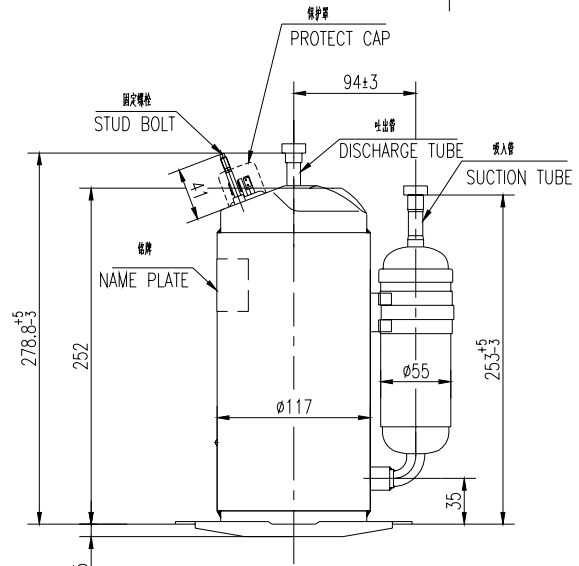

①	PA103M1C-4DZDE2	09.04.12
	PA108M1C-4DZDE2	08.11.29
	机 种 名	年 月 日

①	1	71JD09658		09.04.12
标 记	类 别	更改文件号	修 改	日 期
MARK	NUM.	REV. NO.	MODIFIED BY	DATE

RoHS

设计 DESIGNED BY	影 崎 敏	工 艺 TECHNOLOGY	规格 ABBR. DRAW EXTER
制图 DRAWN BY		标 准 号 STANDARD	材料 MATERIAL
校对 CHECKED BY		审 定 APPROVED BY	图样标记 STAGE OF DRAWING 数量 WEIGHT 比例 SCALE
审核 AGREED BY		日 期 DATE	1 9
		共 页 TOTAL PAGE	第 页 PAGE NO.

Gr	10
图号 DRAWING NO.	1K518805Gr
名称 TITLE	外形图 DRAW EXTER
	广东美芝制冷设备有限公司 GUANGDONG MEIZHI COMPRESSOR LTD