



481140 Termost. Honeywell TH6220U2000-T6-2F/2C-

Honeywell Home

T6 Pro Series Thermostats



SUBMITTAL SHEET

Job Name	
Engineer	
Mechanical Contractor	
Contractor's P.O. No.	
Representative	
Notes	

Model(s)			
TH6210U2001	Qty.		Notes
TH6220U2000	Qty.		Notes
TH6320U2008	Qty.		Notes
Approval			
Service			
Tag No.			

APPLICATION

Model TH6320U2008: Up to 3H/2C Heat Pump systems or up to 2H/2C Conventional systems. Dual fuel and aux heat lockout with outdoor sensor.

Model TH6220U2000: Up to 2H/1C Heat Pump systems or up to 2H/2C Conventional systems. Dual fuel and aux heat lockout with outdoor sensor.

Model TH6210U2001: Up to 2H/1C Heat Pump systems or up to 1H/1C Conventional systems. No outdoor temperature lockouts.

SPECIFICATIONS

Terminal Designations: R, RC, C, W, O/B, W2-AUX, E, Y, Y2, G, L/A, K, S, and S.

Electrical Ratings:

Terminal	Voltage (50/60Hz)	Running Current
W Heating	20-30 Vac	0.02-1.0 A
W2 (Aux) Heating	20-30 Vac	0.02-1.0 A
E Emergency Heat	20-30 Vac	0.02-0.5 A
Y Compressor Stage 1	20-30 Vac	0.02-1.0 A
Y2 Compressor Stage 2	20-30 Vac	0.02-1.0 A
G Fan	20-30 Vac	0.02-0.5 A
O/B Changeover	20-30 Vac	0.02-0.5 A
L/A Input	20-30 Vac	0.02-0.5 A

Power Consumption:

Backlight On: 1.0VA

Cool Indication: Displays "Cool On" when the thermostat turns the cooling on.

Heat Indication: Displays "Heat On" when the thermostat turns the heating on.

Clock Accuracy:

+/- 1 minute every month (30 days) at 77°F.

+/-2 minutes per month over the operating ambient temperature range.

Mounting Means: Thermostat packaged with a UWP™ mounting system that mounts directly on the wall in the living space using mounting screws and anchors provided. Use the optional cover plate (also included with thermostat) to cover marks from previous thermostat.

Temperature Ranges:

Heating: 40 °F to 90 °F (4.5 °C to 32 °C)

Cooling: 50 °F to 99 °F (10 °C to 37 °C)

Operating Ambient Temperature:

37 °F to 102 °F (2.8 °C to 38.9 °C)

Shipping Temperature:

-20 °F to 120 °F (-28.9 °C to 48.9 °C)

Operating Relative Humidity:

5% to 90% (non-condensing)

Physical Dimensions:

4-1/16" H x 4-1/16" W x 1-5/32" D

103.5 mm H x 103.5 mm W x 29 mm D

Color: White

Product	Part Number	Temperature Setpoint Range	Working Ambient Temperature	Operating Relative Humidity	Shipping Temperature	Physical Dimensions in Inches (mm)	Color(s)
Thermostat	TH6210U2001 TH6220U2000 TH6320U2008	Heating: 40 °F to 90 °F (4.5 °C to 32 °C) Cooling: 50 °F to 99 °F (10 °C to 37 °C)	32 °F to 120 °F (0 °C to 48.9 °C)	5% to 90% (non condensing)	-20 °F to 120 °F (-28.9 °C to 48.9 °C)	4-1/16" H x 4-1/16" W x 1-5/32" D 103.5 mm H x 103.5 mm W x 29 mm D	White

MAS INFORMACION:



[Manual del usuario .](#)



[Instrucciones de instalación.](#)



33-00263-03




ansal[®]
REFRIGERACION S.A.
Desde 1946

481140 Termost. Honeywell TH6220U2000-T6-2F/2C-

Product	Part Number	Physical Dimensions in Inches (mm)
UWP Wall plate	Included with thermostat.	2.67" H X 2.28" W X 0.41" D (67.9 mm H X 58 mm W X 10.3 mm D)
Medium cover plate	Included with thermostat.	4.72" H x 5.9" W (119.89 H x 149.89 mm W)
Large cover plate	Optional accessory. Not included with thermostat.	6.11" H X 6.11" W X 0.28" D (155.3 mm H X 155.3 mm W X 7 mm D)
Wired outdoor sensor C7089U1006	Not included with thermostat. Used for dual fuel or aux heat lockout only. Outdoor temp not displayed on thermostat. Not compatible with TH6210U model.	-
Wired indoor sensor C7189U1005	Not included with thermostat. Not compatible with TH6210U model.	-

DIMENSIONS (NOT TO SCALE)

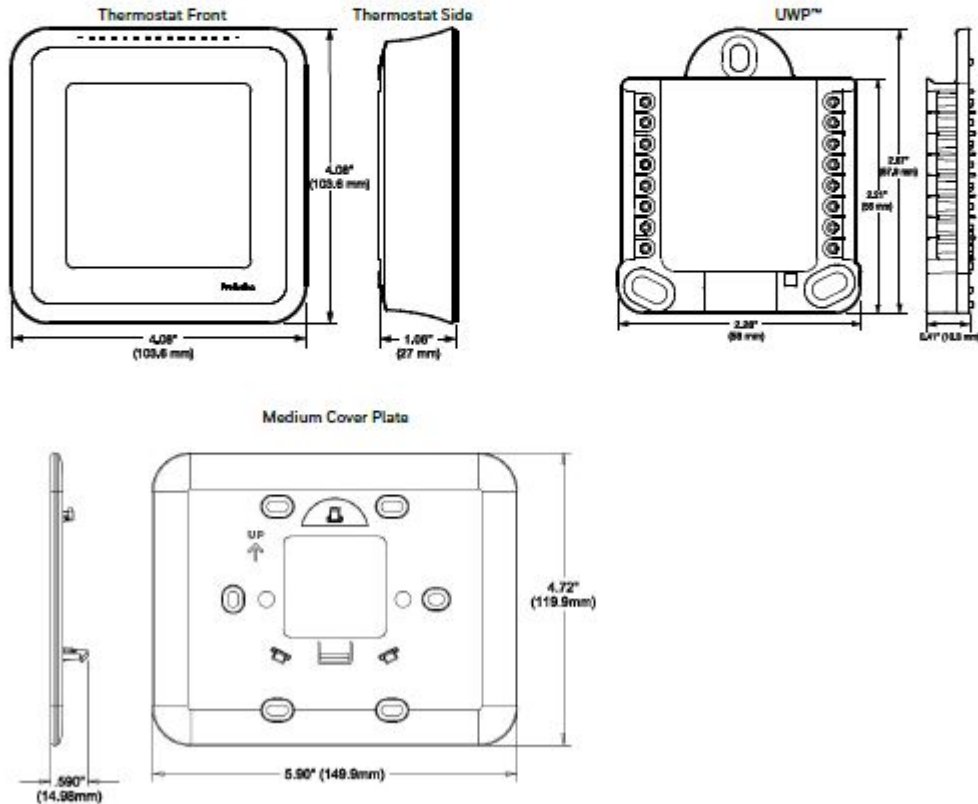

ansal[®]
EXPERIENCIA, INNOVACIÓN Y
LIDERAZGO EN CLIMATIZACIÓN
Desde 1946