


NO.




SPECIFICATION


HANGZHOU WEIGUANG ELECTRONIC CO.,LTD.

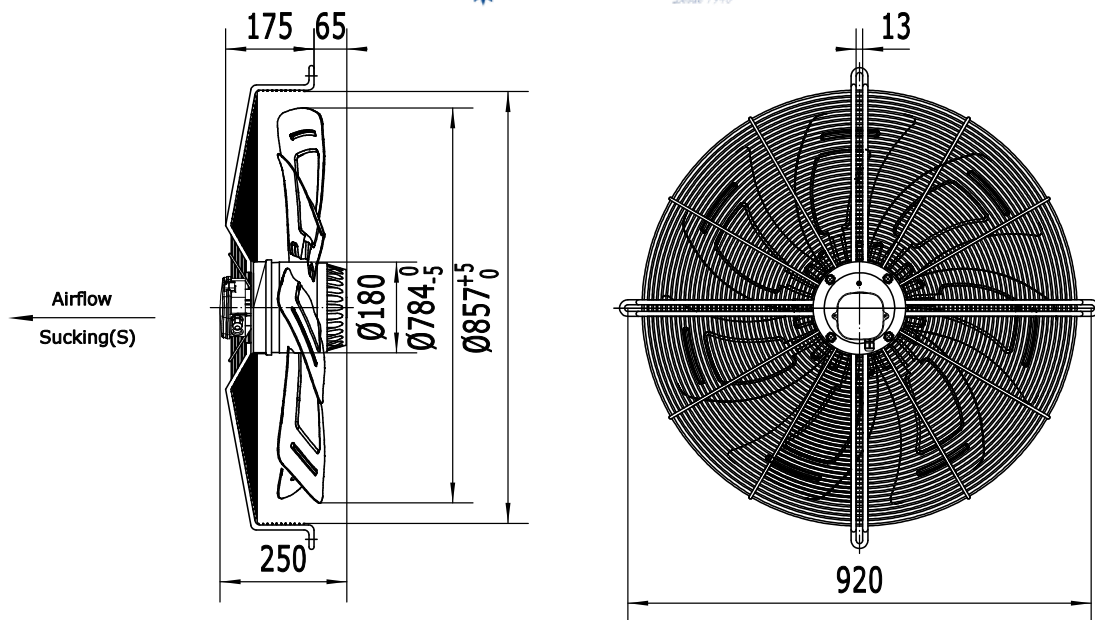


LABEL

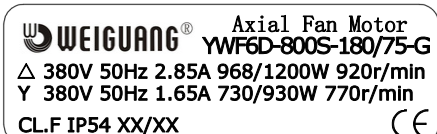

WIRING DIAGRAM

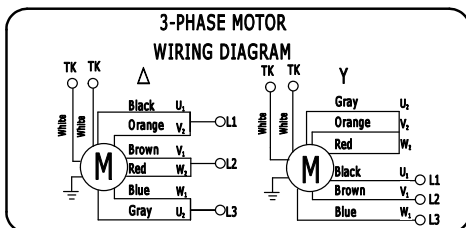

FLOW RATE CURVE

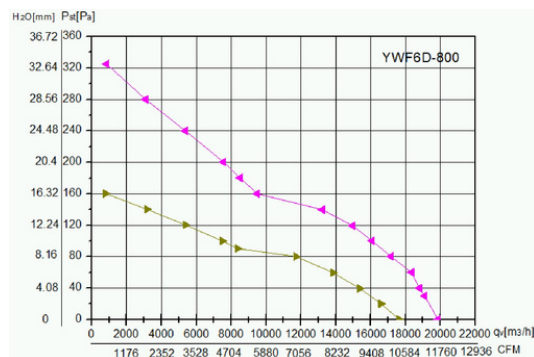

UNIT	Axial fan motor	
MOTOR	Three phases motor	
MOTOR	YWF6D-800S-180/75-G	
VOLTAGE	(V)	380
FREQUENCY	(Hz)	50
INPUT POWER	(W)	Δ/Y 1200/930
CURRENT 电流	(A)	Δ/Y 2.85/1.65
SPEED	(r/min)	Δ/Y 920/770
AIR FLOW	20Pa(m³/h)	Δ/Y 19860/16590
NOISE	(dBA)	Δ/Y 75/74
ROTATION	CW ,looking into the end-shield	
INSULATION CLASS	F	
MOTOR PROTECTION	Thermocontact 150±5℃	
TEMPERATURE RISE	75K max	75K
PROTECTION CLASS	IP54	
OPERATING TYPE	S1	
AMBIENT TEMPERATURE	-30℃ +60℃	
BEARINGS	Ball bearings	
MOUNTING TYPE	Horizontal or Vertical	
ELECTRICAL CONNECTION	Lead wire 1330UL 7G 1.31mm²+ 2G 0.35mm², Length 100mm in terminal box connected (7 1.31mm²+2 0.35mm² 100mm)	
APPROVALS	CCC、CE	
NET WEIGHT/GROSS WEIGHT	35/50kg	
PACKING	89*89*27.5cm	

REV.	DESCRIPTION	APPROVED	DATE	DRN.BY	SIGN	DATE	TITLE
				CHD.BY			YWF6D-800S-180/75-G
				ENG.BY			PROJECTION
				APP.BY			A4 SCALE SHEET: of