



FILTRO DESARMABLE S/NÚCLEO BlueStar

Product Introduction

XFA take-apart filter drier with exchangeable solid core uses the flange connection to seal. It is very convenient to adjust and maintain the equipment. It can be used in the liquid line and suction line of the refrigeration system for cold storage and air adjusting equipment.


Features

- ◆ Sturdy steel shells prolonged the life of product.
- ◆ Low pressure loss when full flowing.
- ◆ Surface corrosion resistant static electrical painting procedure protecting the shell from the rust.
- ◆ Can be matched well with all brands of 48 series of Line Filter Blocks and Suction Line Filter Cores.
- ◆ Simple internal parts making the installation easy, and all parts are steel galvanized.



Design Functions

- 1、 Bolt of level 8.8
- 2、 Flange plate(45#)
- 3、 Flange ring(20#)
- 4、 Spring (65Mn)
- 5、 Core bracket (20#)
- 6、 Steel filter shell (Q235)
- 7、 End cap (ST 12)
- 8、 ODF connection (TP2Y2)

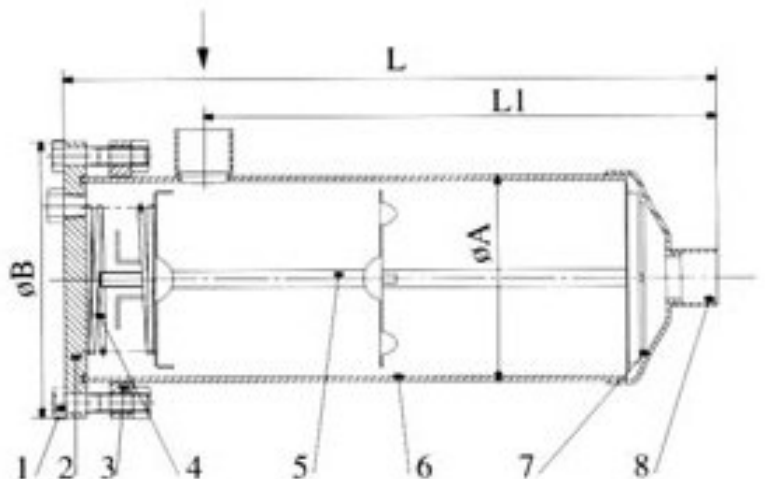

TYPE	ODF(in)	Liquid Refrigeration Capacity					Dimensions				Cores Qty (pcs.)	Weight
		R-22	R134a	R407C	R404A/R507	R502	L	L1	A	B		
XFA-485T	5/8	73.5	66.5	70.0	49.0	45.5	9.31	6.09	4.5	6.05	1	5.5
XFA-487T	7/8	133.0	122.5	129.5	87.5	84.0	9.35	6.25	4.5	6.05	1	5.5
XFA-489T	1-1/8	185.0	168.0	178.5	122.5	119.0	9.38	6.31	4.5	6.05	1	5.5
XFA-4811T	1-3/8	213.5	196.0	206.5	140.0	136.5	9.75	6.44	4.5	6.05	1	5.5
XFA-967T	7/8	143.5	129.5	140,027	94.5	91.0	15.13	11.87	4.5	6.05	2	8.0
XFA-969T	1-1/8	220.5	203.0	213.5	147.0	140.0	15.19	11.97	4.5	6.05	2	8.0
XFA-9611T	1-3/8	276.5	252.0	269.5	182.0	178.5	15.31	12.06	4.5	6.05	2	8.0
XFA-9613T	1-5/8	297.5	273.0	290.5	196.0	192.5	15.31	12.06	4.5	6.05	2	8.0
XFA-1449T	1-1/8	213.5	196.0	206.5	140.0	136.5	20.50	17.25	4.5	6.05	3	10.0
XFA-14411T	1-3/8	308.0	283.5	301.1	203.0	199.5	20.75	17.53	4.5	6.05	3	10.0
XFA-14413T	1-5/8	339.5	311.5	332.5	224.0	220.5	20.75	17.53	4.5	6.05	3	10.0
XFA-14417T	2-1/8	392.0	360.5	381.5	259.0	252.0	20.94	17.63	4.5	6.05	3	10.0
XFA-19211T	1-3/8	329.0	301.0	322.0	217.0	213.5	26.66	23.41	4.5	6.05	4	19.5
XFA-19213T	1-5/8	360.5	332.5	353.5	238.0	231.0	26.66	23.41	4.5	6.05	4	19.5
XFA-19217T	2-1/8	402.5	371.0	392.0	266.0	259.0	26.84	23.63	4.5	6.05	4	19.5
XFA-30013T	1-5/8	266.0	245.0	259.0	175.0	171.5	24.78	19.66	6.0	7.87	3	21.0
XFA-30017T	2-1/8	322.0	294.0	315.0	213.5	206.5	24.78	19.87	6.0	7.87	3	21.0
XFA-40017T	2-1/8	339.5	311.5	332.5	224.0	220.5	34.56	30.50	6.0	7.87	4	23.0
XFA-40021T	2-5/8	385.0	353.5	374.5	255.5	248.5	34.75	30.56	6.0	7.87	4	23.0

