




How to use

1. BRAND CODE SETTING

QUNDA patent


From beginning to end only 6s

FIND OUT CODES
FOR EXAMPLE 0288

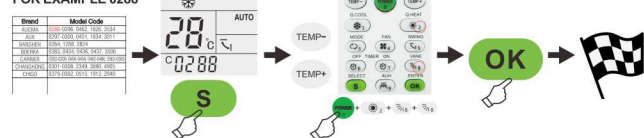

2. AUTO-SEARCHING

5 Seconds



Technical Parameters

Controllable distance: Large than 8 meters
Power supply voltage: DC3V
Battery model: Battery AAA(UM-4, R03) X 2
Dimension: L135mm X W55mm X D15mm
Weight: Apprx X 54g(excl.the batteries)



6 197424613302041



MADE IN CHINA
NO.K-E-00248-V1

Suits for more other brands:

AUCMA
AUX
CARRIER
CHANGHONG
CHIGO
CHUNLAN
CONROWA
CORONA
DAIKIN
FUJITSU
GOLDSTAR
GREE
HAIER
HITACHI
HISENSE
HUABAO
KELON
KONKA
LG
MACQUAY
MIDEA
MITSUBISHI
NATIONAL
PANASONIC
PHILCO
ROWA
SAMSUNG
SANYO
SHANGLING
SHARP
SHINCO
SOVA
TCL
TECO
TOSHIBA
UNI-AIR
WHIRLPOOL
YORK



KT-6018

Universal A/C Remote Control User's Guide



Perface

Dear user:

Thanks for choosing our remote, and bring you convenience is our best wish. KT-6018 is a 6000 codes universal remote suitable for domestic kits, international kits, new models, old models, frequency conversion, inverter unit, and controls 98% of the air conditioners all over the world. It contains electric heater, timer on/off, inputting codes by digital keys. Due to the patent of inputting codes by digital keys (Patent no.: ZL200810023186.7), even thousands of the codes we only need few seconds to finish the setting. It's your best choice to update and replace the originals. Please carefully read the instruction before your setting and help you use the remote easily.

Setting

Open the battery cover and insert two AAA batteries by right polarity. Set as following down.

1. Set the code

- 1) Pick the code of your brand on the code list. If yours are more than one, please start from the first, then follow down until it works. Such as Aucma, first input "0288". If it doesn't work, then input "0289".
- 2) Press "SELECT" button, the code will flash on the LCD. Then input the right code successively. Such as "0288", first press "0" and "0" stops flashing, then press "2" and "2" stops flashing, press "8" and "8" stops flashing, press "8" and "8" stops flashing. The setting is finished, it will be confirmed automatically.
- 3) Aim at the air conditioner and check all of the buttons work well. If it doesn't, operate as No.2 to input the code "0289" or the next.

2. Auto research

- If you don't know the brand or can't find it on the code list, please operate as following.
- 1) Aim at the air conditioner and hold "SELECT" for five seconds. Then the remote will go into auto research and send signal continuously. The code will flash and increase, once the air conditioner receives it and send "BUZZER" sound. Press any button to confirm (it needs you quick, or the the code may be over to result you research again).
 - 2) After the air conditioner turned on, check all of the buttons work well. If it doesn't, repeat the above operation until all done.

TIMER ON/OFF

Set the timer on when power off, and set the timer off when power on.

- 1) Press the "TIMER ON" button, the LCD displays the clock symbol and time blinking. Press "TEMP + or -" button, adjust to the required time (every pressing for one hour, the maximum is 12 hours). Press "TIMER ON/OK" to confirm. Also it will confirm automatically after 8 seconds without operation.
- 2) Press the "TIMER OFF" button, the LCD displays the clock symbol and time blinking. Press "TEMP + or -" button, adjust to the required time (every pressing for one hour, the maximum is 12 hours). Press "TIMER OFF/OK" to confirm. Also it will confirm automatically after 8 seconds without operation.

▲ NOTE:

1. After timer setting, the launch direction of remote control must be aim at the receiving direction of your air conditioner in an effective distance, otherwise the timer setting ineffectively.
2. After timer setting, repress "TIMER ON/OFF" button to cancel. (Cancel timer on to press "TIMER ON" button, cancel timer off to press "TIMER OFF" button).

Brand Code Table

Brand	Model Code	Brand	Model Code
ALPIN	0252-0253, 1276, 1789	LIANGYU	0233, 0451, 1987, 3817
AUCMA	0288-0296, 0462, 1826, 3534	LITTLE DUCK	0015-0020, 0530, 1039
AUX	0297-0300, 0451, 1834, 3011	LOREN-SEBO	0255, 0471, 0472, 2007, 3327
BANSHEN	0264, 1288, 2824	MACQUAY	0234-0237, 0465, 1489, 2794
BOERKA	0383, 0434, 0436, 0437, 3506	MICOM	0415, 1439, 2465, 3487
CARRIER	0203-0209, 0456-0458, 0482-0486, 0563-0565	MIDEA	0260-0265, 0526, 1801, 2820
CHANGHONG	0301-0308, 2349, 3890, 4905	MITSUBISHI	0001-0045, 0476-0479, 0552, 0553, 0558, 0582, 5000
CHIGO	0379-0382, 0515, 1912, 2940	NORITZ	0431, 0943, 2991, 5005-5256
CHOFU	0184-0187, 1208, 2233, 4330	OMEGA	0559
CHUNLAN	0345-0350, 0450, 0453, 3522	PANASONIC	0138-0154, 0483, 2714, 3722
CORONA	0155-0163, 0459, 2204, 3531	PANDA	0378, 1914, 3962, 5257-5259
CONROWA	0377, 0889, 1315, 2937	PHILCO	0210-0211, 0487, 0488, 1234
CONSUL	0463, 1999, 3535, 4335-4650	PROTON	0421-0423, 0934, 2981
DAEWOO	0203-0209, 0406, 1430, 3792	RAYBO	0362-0367, 2410, 3435, 5278
DAIKIN	0171-0183, 0566, 0567, 0583	ROWA	0369, 0438-0439, 0527, 0531
DOCTOR	0221, 0449, 1473, 3805	SABRO	0435, 0506-0508, 0947, 3578
DONGBAO	0355-0361, 1897, 2918, 4652	SAJIO DENKI	0212-0215, 0724, 2262
DONGXINBAO	0413, 1505, 3485, 4700-4768	SAMPO	0424-0426, 1448, 2985, 5450
ELECTROLUX	0216-0220, 0569, 1244	SAMSUNG	0188-0196, 0516, 0518, 1212
FEDDERS	0528, 4804, 4820-4900	SANYO	0046-0095, 0529, 0530, 1070
FRESTECH	0277, 0519, 0520, 2325	SASUKI	0254, 0470, 1494, 2814
FUJITSU	0127-0137, 0464, 0552-0554	SHANGLING	0384-0388, 0444-0445, 3407
FUNAI	0430, 0481, 3041, 3502	SHANXING	0392, 0449, 0612, 0904, 1985
GALANZ	0371, 0372, 0521, 1908, 2931	SHARP	0096-0106, 0525, 1122
GENERAL	0127-0137, 0464, 2000, 3712	SHENGFENG	0376, 0480, 0888, 1911
GUOQIAO	0244, 0291, 1268, 2851	SHINCO	0351-0354, 0454-0456, 3935
GLEE	0398, 0399, 2446, 2959, 5260	SHUANGLI	0376, 0404-0407, 0480, 1400
GOLDSTAR	0201, 0466-0469, 1737, 3539	SHUAIKANG	0288, 0800, 5450-5643
GREE	0309-0316, 0482, 0512, 0513	SONGGE	0428-0429, 2988, 3501
HAIER	0266-0272, 0453-0455	SOVA	0409-0410, 1433, 2457
HISENSE	0332-0335, 0517, 1868, 2895	SUMMER	0427, 1963, 5644-5700
HITACHI	0118-0126, 1656, 2173	SUNDRUG	0257, 0505, 1529, 2305
HUABAO	0336-0344, 2384, 2903, 4905	SWAN	0434, 0516, 0524, 2994
HUAKE	0408, 0920, 1501, 3480	TADIRAN	0246-0251, 0759, 1787, 5701
HUAMEI	0402, 0460-0465, 2962, 3986	TATUNG	0419-0420, 2980, 3491
HUALING	0317-0325, 0452, 2365, 3524	TCL	0273-0281, 0570, 0786
HUIFENG	0370, 2418, 3442	TECO	0256, 0473-0475, 1497, 3840
HUIKANG	0368, 0441-0443, 1978, 3440	TIANDI	0415, 1439, 3999, 5720-5759
HYUNDAI	0202, 0433, 0480, 0551, 3552	TOSHIBA	0107-0117, 0489, 0561, 0562, 1001
JDC	0373, 0440, 2488, 3957	TRANE	0227-0232, 0739, 1101, 1768
JIANGNAN	0432, 1456, 3607, 4906-4915	UNI-AIR	0222-0224, 0450, 1986
JINTAR	0414, 1950, 3998, 4655-4669	WANBAO	0138-0154, 0483, 0652, 0995
JINSONG	0389-0391, 0446-0448, 3463	WEILI	0393-0396, 1420, 1932
JOHNSON	0245, 0492, 2028, 3829	WHIRLPOOL	0164-0170, 0502, 1536, 3748, 0481, 0993, 5800-5966
KANGLI	0374-0375, 1911, 2442	XILENG	0411, 0412, 0924, 1947
KELON	0282-0287, 0473, 0485-0488	XINLE	0400, 0401, 0913, 2960
KLIMATAIR	0225, 0226, 0452, 3297	YANGZI (YAIR)	0403, 1427, 2451
KOLIN	0416-0418, 2466, 3488	YINYAN	0258-0259, 0326-0331, 0838
KONKA	0397, 0457-0459, 3017	YORK	0238-0243, 0751, 1778
LG	0197-0200, 0514, 0572, 2248	ZHEN BAO	0127-0137, 0464, 2000, 3711

Attention

1. If it is not used for a long time, remove the battery to avoid leakage liquid of the battery to damage the remote control. When the LCD looks dim, please change batteries. (New and old batteries can not be used together) After the batteries are replaced every time, it is not necessary to set model code again.
2. Check carefully that there is no remora between remote controller and Air conditioner when the time on/off doesn't work. Because the operation is effective only when the air conditioner receives the timer on/off signal from remote controller.
3. The manufacturer keeps the right to change the parameter and function of product.