


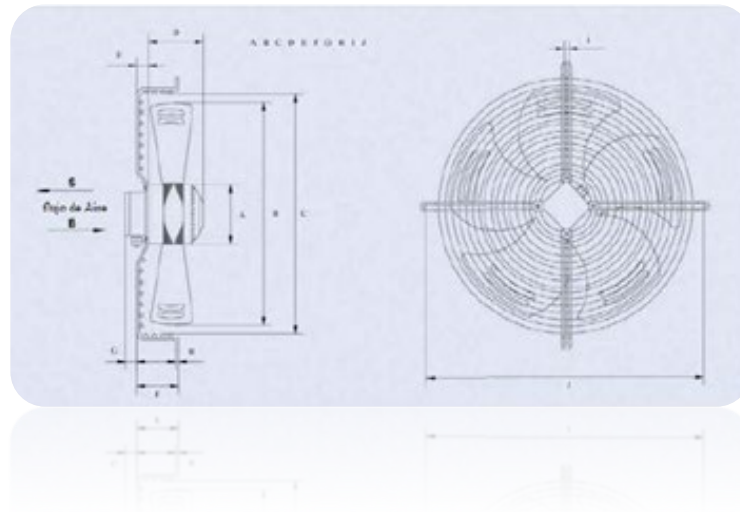

**Blue Star**
**CARACTERISTICAS:**

| Código Ansal | Modelo       | Voltaje | Diámetro Pala | Sen do del Aire | Velocidad (rpm) | Caudal de Aire m3/h | Capacitor | Consumo (Amp) | Peso (kg) |
|--------------|--------------|---------|---------------|-----------------|-----------------|---------------------|-----------|---------------|-----------|
| 949702       | YWF4E - 300S | 220V    | 300mm         | Aspirante       | 1380            | 1743                | 3uf       | 0,37          | 3,3       |
| 949704       | YWF4E - 300B | 220V    | 300mm         | Soplante        | 1380            | 1743                | 3uf       | 0,37          | 3,3       |
| 949706       | YWF4E - 350S | 220V    | 350mm         | Aspirante       | 1360            | 2973                | 4uf       | 0,70          | 4,9       |
| 949708       | YWF4E - 350B | 220V    | 350mm         | Soplante        | 1360            | 2973                | 4uf       | 0,70          | 4,9       |
| 949710       | YWF4E - 400S | 220V    | 400mm         | Aspirante       | 1380            | 4440                | 6uf       | 0,80          | 5,6       |
| 949711       | YWF4D - 400S | 380V    | 400mm         | Aspirante       | 1380            | 4440                | -         | 0,40          | 5,6       |
| 949712       | YWF4E - 400B | 220V    | 400mm         | Soplante        | 1380            | 4440                | 6uf       | 0,80          | 5,6       |
| 949714       | YWF4E - 450S | 220V    | 450mm         | Aspirante       | 1350            | 5600                | 8uf       | 1,50          | 7,2       |
| 949715       | YWF4D - 450S | 380V    | 450mm         | Aspirante       | 1360            | 5507                | -         | 0,52          | 7,2       |
| 949716       | YWF4E - 450B | 220V    | 450mm         | Soplante        | 1350            | 5600                | 8uf       | 1,50          | 7,2       |
| 949717       | YWF4D - 450B | 380V    | 450mm         | Soplante        | 1360            | 5507                | -         | 0,52          | 7,2       |
| 949718       | YWF4E - 500S | 220V    | 500mm         | Aspirante       | 1300            | 6046                | 10uf      | 1,75          | 9,5       |
| 949719       | YWF4E - 500B | 380V    | 500mm         | Aspirante       | 1300            | 6245                | -         | 0,70          | 9,5       |
| 949720       | YWF4E - 500B | 220V    | 500mm         | Soplante        | 1300            | 6046                | 10uf      | 1,75          | 9,5       |
| 949721       | YWF4E - 500B | 380V    | 500mm         | Soplante        | 1300            | 6246                | -         | 0,70          | 9,5       |
| 949732       | YWF4E - 550S | 380V    | 550mm         | Aspirante       | 1300            | 8720                | -         | 1,20          | 10,5      |
| 949734       | YWF4E - 550B | 380V    | 550mm         | Soplante        | 1300            | 8720                | -         | 1,20          | 10,5      |
| 949722       | YWF4E - 630S | 380V    | 630mm         | Aspirante       | 1300            | 13000               | -         | 1,60          | 15        |
| 949724       | YWF4E - 630B | 380V    | 630mm         | Soplante        | 1300            | 12500               | -         | 1,60          | 15        |
| 949726       | YWF6E - 710S | 380V    | 710mm         | Aspirante       | 900             | 15670               | -         | 1,75          | 30        |

**Dimensiones**


| Código Ansal | Modelo       | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | J (mm) |
|--------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 949702       | YWF4E - 300S | 92     | 300    | 320    | 86     | 30     | 80     | 30     | 5      | 7      | 360    |
| 949704       | YWF4E - 300B | 92     | 300    | 320    | 86     | 30     | 80     | 30     | 5      | 7      | 360    |
| 949706       | YWF4E - 350S | 102    | 350    | 370    | 104    | 30     | 80     | 30     | 5      | 9,5    | 422    |
| 949708       | YWF4E - 350B | 102    | 350    | 370    | 104    | 30     | 80     | 30     | 5      | 9,5    | 422    |
| 949710       | YWF4E - 400S | 102    | 400    | 420    | 117    | 30     | 90     | 30     | 5      | 9,5    | 470    |
| 949711       | YWF4D - 400S | 102    | 400    | 420    | 117    | 30     | 90     | 30     | 5      | 9,5    | 470    |
| 949712       | YWF4E - 400B | 102    | 400    | 420    | 117    | 30     | 90     | 30     | 5      | 9,5    | 470    |
| 949714       | YWF4E - 450S | 102    | 450    | 470    | 130    | 30     | 90     | 30     | 6      | 9,5    | 522    |
| 949715       | YWF4D - 450S | 102    | 450    | 470    | 130    | 30     | 90     | 30     | 6      | 9,5    | 522    |
| 949716       | YWF4E - 450B | 102    | 450    | 470    | 130    | 30     | 90     | 30     | 6      | 9,5    | 522    |
| 949717       | YWF4D - 450B | 102    | 450    | 470    | 130    | 30     | 90     | 30     | 6      | 9,5    | 522    |
| 949718       | YWF4E - 500S | 137    | 500    | 520    | 130    | 30     | 90     | 30     | 6      | 10,5   | 570    |
| 949719       | YWF4E - 500B | 137    | 500    | 520    | 130    | 30     | 90     | 30     | 6      | 10,5   | 570    |
| 949720       | YWF4E - 500B | 137    | 500    | 520    | 130    | 30     | 90     | 30     | 6      | 10,5   | 9,5    |
| 949721       | YWF4E - 500B | 137    | 500    | 520    | 130    | 30     | 90     | 30     | 6      | 10,5   | 570    |
| 949732       | YWF4E - 550S | 137    | 550    | 570    | 144    | 30     | 100    | 30     | 6      | 10,5   | 622    |
| 949734       | YWF4E - 550B | 137    | 550    | 570    | 144    | 30     | 100    | 30     | 6      | 10,5   | 622    |
| 949722       | YWF4E - 630S | 137    | 630    | 650    | 164    | 30     | 100    | 30     | 7,5    | 10,5   | 750    |
| 949724       | YWF4E - 630B | 137    | 630    | 650    | 164    | 30     | 100    | 30     | 7,5    | 10,5   | 750    |
| 949726       | YWF6E - 710S | 180    | 703    | 770    | 191    | 30     | 130    | 30     | 8      | 13     | 840    |

**Mas información...**


Circuito eléctrico.

