

905111 Mot."L'UNITE"5HP-M22-TAGP4561-3f-paralelo



Motocompresor "L'UNITE" 5Hp M22- TAGP4561-3f-paralelo

Tabla de Desempeño

Régimen : Standard TE - Prod. frigoríf. (W)

| Evap (°C) | Condensación (°C) | | | | | |
|-----------|-------------------|-------|-------|-------|-------|-------|
| | 35 | 40 | 45 | 50 | 55 | 60 |
| -25 | 2731 | 2346 | 1977 | 1628 | 1302 | 1001 |
| -20 | 3834 | 3368 | 2917 | 2484 | 2071 | 1682 |
| -15 | 5199 | 4644 | 4102 | 3575 | 3067 | 2579 |
| -10 | 6857 | 6205 | 5562 | 4933 | 4320 | 3725 |
| -5 | 8841 | 8081 | 7329 | 6588 | 5861 | 5150 |
| 0 | 11180 | 10304 | 9434 | 8572 | 7722 | 6886 |
| 5 | 13907 | 12905 | 11907 | 10916 | 9933 | 8963 |
| 10 | 17053 | 15916 | 14781 | 13651 | 12527 | 11413 |
| 15 | 20648 | 19368 | 18087 | 16808 | 15534 | 14268 |

Prestaciones

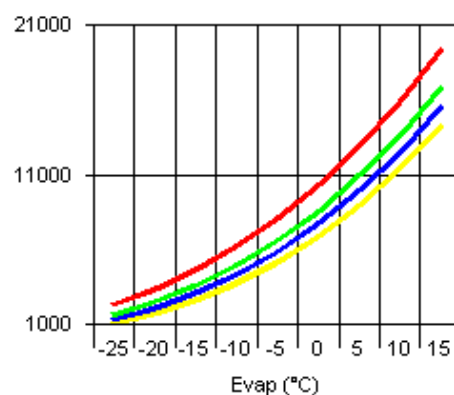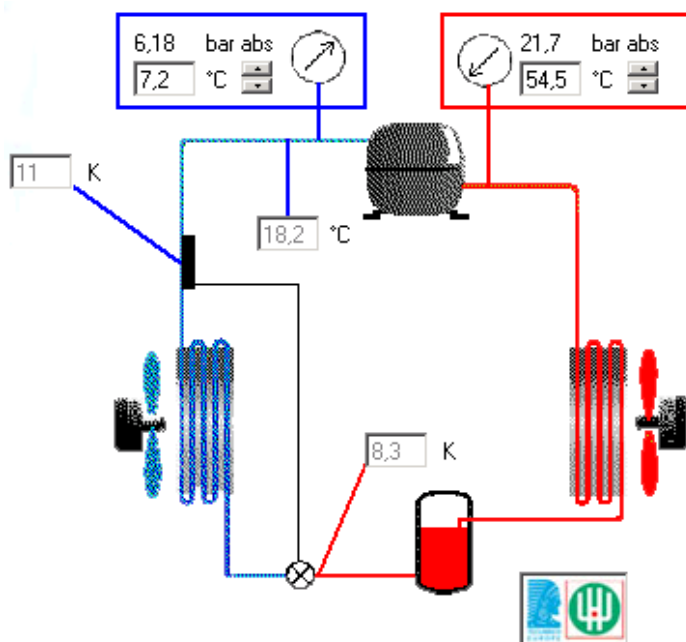

Condensación (°C)
 40 50 55 60

Datos Técnicos

| | |
|-----------------|-------------|
| Régimen | Standard TE |
| Prod. frigoríf. | 11129 W |
| P. electrica | 3843 W |
| Intensidad | 14,5 A |
| COP | 2,9 W/W |
| Caudal másico | 253 Kg/h |

Esquema Eléctrico

